

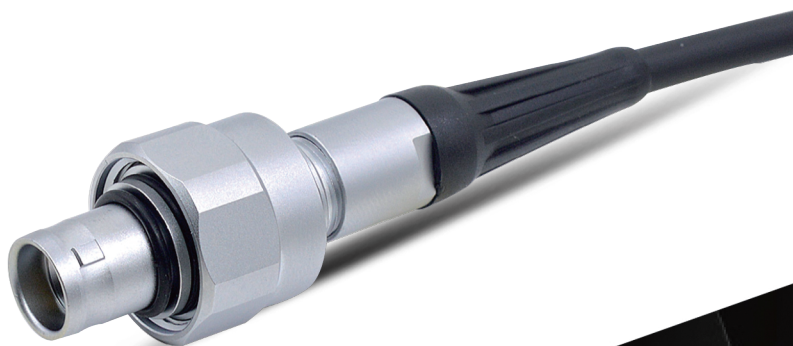


RM-W Series

Deepsea Screw Locking Metal Connector

RM series has same insulator and contact configuration as B series:

- secure high performance screw locking system
- Ideal for using underwater 300m
- High pin density contributing to equipment miniaturization
- Alignment Key and Polarized Keying System to avoid cross-interface
- Sealed up to IP68 and hermetic
- 360° EMC shielded
- Robust and shock resistant designs
- Functional in a wide temperature range from -50°C to +250°C
- Available solder, PCB and right angle PCB contact




RM-W Series

Plugs




FVG

Receptacles



EVG

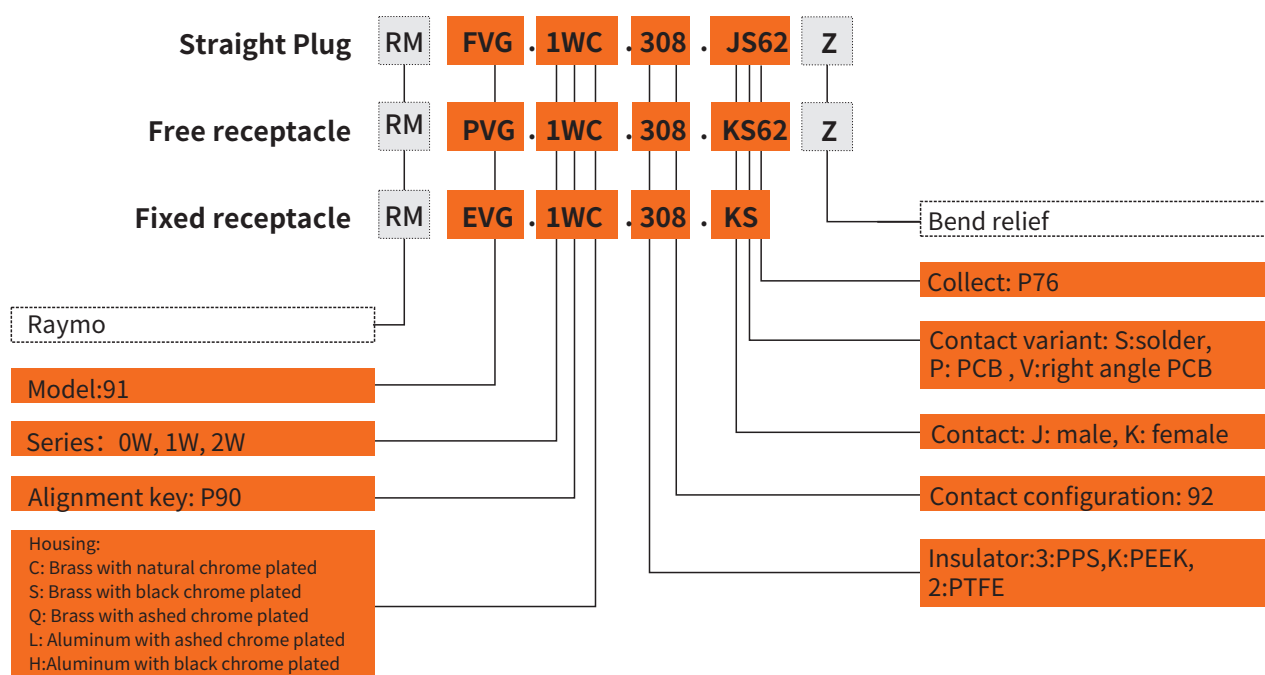Part Numbering System



Part No.Example

Straight plug with cable collet

RM-FVG-1WC-308-JS62I straight plug, 1W series, , multipole 8 contacts, ouer shell in natural chrome-plated brass, PPS insulator, male solder contacts, collet for 6.0 mm diameter cable, with a black bend relief IP68

Fixed receptacle

RM-EVG-1WC-308-KS fixed receptacle, 1W series, multipole 8pin, outer shell in natural chrome-plated brass, PPS insulator, female solder contacts, IP68

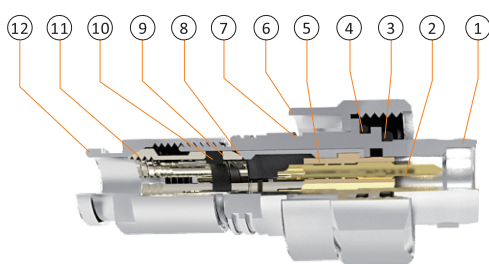
Free receptacle

RM-PVG-1WC-308-KS62Z free receptacle, 1W series, multipole 8pin, outer shell in natural chrome-plated brass, PPS insulator, female solder contacts, collet for 6.0 mm diameter cable, with a black bend relief IP68

Part Section Showing Internal Components


Cable Mount Plug

- ① Inner shell
- ② Male contact
- ③ O-ring 1
- ④ O-ring 2
- ⑤ Insulator
- ⑥ Plug screw
- ⑦ Snap Spring
- ⑧ Earthing tag
- ⑨ Conical gasket
- ⑩ Inner washer
- ⑪ Cable collet
- ⑫ Collet nut



Fixed Receptacle

- ① Outer shell
- ② Insulator
- ③ Washer
- ④ Female contact
- ⑤ Hexagonal nut
- ⑥ Retaining ring



Technical Characteristics

Mechanical and Climatical

Characteristics	Value	Standard
Endurance	>5000cycles	IEC60512-5test9a
Humidity	Up to 95% at 60°C	
Temperature range	-55°C,+250°C	
Resistance to vibration	10-2000Hz,15g	IEC 60512-4 test 6d
Shock resistance	100g,6ms	IEC 60512-4 test 6c
Salt spray corrosion test	>96hrs	IEC 60512-6 test 11f
Protection index (mated)	IP68	IEC 60529
Climatical category	55/175/21	IEC 60068-1


Electrical

Characteristics		Value	Standard
Shielding efficiency	at 10 MHZ	>95 dB	IEC 60619-1-3
	at 1 GHz	>80 dB	IEC 60619-1-3

Alignment key and Polarized Keys(RM-W series)

RM-W series connector model type are composed of five letters.The LASTLETTER indicates the key position and the contact type(male or female)



Front view of receptacle



Code	Keys No.	Angles	Series				Contact Type		Remark
			0W	1W	2W	3W	Plug	Receptacle	
G	1		0°	0°	0°	0°	Male	Female	●
A	2	α	30°	30°	30°	30°	Male	Female	●
B	2		45°	45°	45°	45°	Male	Female	●
C	2	γ	60°	60°	60°	60°	Male	Female	○



● Available

○ Optional



RM-FVG Cable Mount Straight plug, nut for fitting a bend relief




























Reference		Dimensions(mm)						
Model	Series	A	B	L	M	N	S3	S3
RM-FVG	0W	17.2	8.9	35.5	30.8	13.5	16	8
RM-FVG	1W	19.3	11.0	43.7	35.5	14.0	18	9
RM-FVG	2W	23.5	14.0	52.5	43.0	15.5	22	12



RM-EVG Fixed socket



Reference		Dimensions(mm)									
Model	Series	A	B	e	e1	E	L	N	S1	S2	S3
RM-EVG	0W	16.2	16.0	M12*1.0	M14*1.0	4.0	21.7	8.0	10.5	12.5	14
RM-EVG	1W	18.3	19.5	M14*1.0	M16*1.0	8.0	27.0	9	12.5	14.5	17
RM-EVG	2W	22.5	21.8	M16*1.0	M20*1.0	9.0	30.7	12	14.5	18.5	19

Insulator Configuration

	solder male contact 	solder female contact 	Insulator	Contact No.	ØA(MM)	Contact type			Test voltage(contact -shell) k/v AC-rms	Test voltage(contact -contact)k/v AC-rms	Rated current /A
						Solder contact	PCB straight contact	PCB elbow contact			
00			302	2	0.5	●	●	●	1.00	0.95	5.0
			303	3	0.5	●	●	●	0.80	0.95	3.0
			304	4	0.5	●	●	●	0.80	0.65	2.0
			305	5	0.35	●	●	●	0.7	0.6	1.5
			307	7	0.3	●	●	●	0.50	0.6	1.0
0B 0K 0W			302	2	0.9	●	●	●	1.30	1.05	10.0
			303	3	0.9	●	●	●	1.20	0.90	8.0
			304	4	0.7	●	●	●	0.85	0.70	7.0
			305	5	0.7	●	●	●	1.00	0.70	6.5
			306	6	0.5	●	●	●	0.85	0.65	2.5
			307	7	0.5	●	●	●	0.80	0.70	2.5
			309	9	0.5	●	●	●	0.60	0.50	2.0
1B 1K 1W			302	2	1.3	●	●	●	1.50	1.35	15.0
			303	3	1.3	●	●	●	1.30	1.55	12.0







- First choice alternative
- Special order alternative

Insulator Configuration

		solder male contact	solder female contact	Insulator	Contact No.	ØA(MM)	Contact type			Test voltage(contact -shell) k/v AC-rms	Test voltage(contact -contact)k/v AC-rms	Rated current /A
							Solder contact	PCB straight contact	PCB elbow contact			
1B 1K 1W				304	4	0.9	●	●	●	1.35	1.45	10.0
				305	5	0.9	●	●	●	1.25	1.15	9.0
				306	6	0.7	●	●	●	1.05	1.20	7.0
				307	7	0.7	●	●	●	0.95	1.05	7.0
				308	8	0.7	●	●	●	0.95	1.15	5.0
				310	10	0.5	●	●	●	0.90	1.50	2.5
				314	14	0.5	●	●	●	0.80	1.20	2.0
				316	16	0.5	●	●	●	0.80	1.25	1.5
2B 2K 2W				302	2	2.0	●	●	●	2.10	1.75	25.0
				303	3	1.6	●	●	●	2.40	1.85	17.0
				304	4	1.3	●	●	●	1.85	1.85	15.0
				305	5	1.3	●	●	●	1.75	1.60	14.0

















- First choice alternative
- Special order alternative

Insulator Configuration

		solder male contact	solder female contact	Insulator	Contact No.	Ø A(MM)	Contact type			Test voltage(contact -shell) k/v AC-rms	Test voltage(contact -contact)k/v AC-rms	Rated current /A
							Solder contact	PCB straight contact	PCB elbow contact			
2B 2K 2W			306	4	1.3	●	●	●	1.35	1.45	12.0	
			307	7	1.3	●	●	●	1.75	1.60	11.0	
			308	8	0.9	●	●	●	1.50	1.25	10.0	
			310	10	0.9	●	●	●	1.45	1.30	8.0	
			312	12	0.7	●	●	●	1.25	1.35	7.0	
			314	14	0.7	●	●	●	1.15	1.35	6.5	
			316	16	0.7	●	●	●	0.95	1.25	6.0	
			318	18	0.7	●	●	●	0.85	1.20	5.5	
			319	19	0.7	●	●	●	0.95	1.25	5.0	
3B 3K			302	2	3.0	●	●	-	2.10	1.55	35.0	
			303	3	2.0	●	●	●	1.90	1.50	25.0	

- First choice alternative
- Special order alternative

Insulator Configuration

	solder male contact 	solder female contact 	Insulator	Contact No.	ØA(MM)	Contact type			Test voltage(contact -shell) k/v AC-rms	Test voltage(contact -contact) k/v AC-rms	Rated current /A
						Solder contact	PCB straight contact	PCB elbow contact			
3B 3K			304	4	2.0	●	●	●	1.45	1.25	19.0
			305	5	1.6	●	●	●	1.90	1.25	19.0
			306	6	1.6	●	●	●	1.60	1.15	17.0
			307	7	1.6	●	●	●	1.70	1.25	15.0
			308	8	1.3	●	●	●	1.65	1.15	13.0
			309	8 1	1.3 2.0	●	●	-	1.35 1.35	1.05 1.05	6.0 15.0
			310	10	1.3	●	●	●	1.25	0.90	12.0
			312	12	0.9	●	●	●	1.45	1.00	9.0
			314	14	0.9	●	●	●	1.20	1.20	9.0
			316	16	0.9	●	●	●	1.20	0.85	8.0
			330	30	0.7	●	●	●	0.80	0.70	3.5
			332	32	0.7	●	●	●	0.75	0.70	3.0

- First choice alternative
- Special order alternative

